

二. XS 標準型

1. 特性

- (1) 網目為菱形
- (2) 產品輕而堅固
- (3) 美觀，適用作裝飾用途
- (4) 與XG格子型同樣具良好之透光及通風效果，施工簡易而價格便宜

2. 用途

具多樣化用途，如作各種機器防護欄、間隔、發電所電纜架、車輛通風氣窗，圍牆、欄杆、保護網、水泥補強材料或製造籃框、電器用品及傢俱等。


II. XS Typs Grating

1. Features :

- (1) Mesh is in rhombic shape
- (2) Light in weight and sturdy
- (3) Artistic, good for decorative purposes
- (4) Allows good passage of light and air as XG Type grating, easy to apply and economic

2. Applications :

The product have various applications, it can be used as guard wall of machinery, partition, cable shelves, vehicles ventilator, fencing, banister, concrete reinforcing material and also for the fabrication of basket and the manufacturing of electrical appliance and furniture, etc.

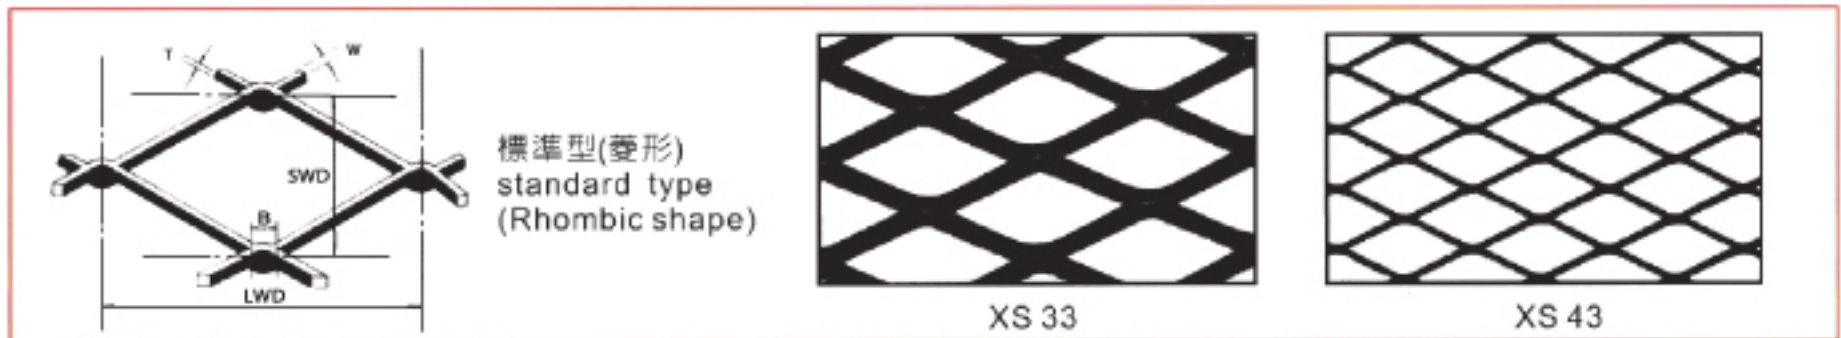

3、製品規格表 PRODUCT SPECIFICATIONS

種類 Category	稱呼 Designation JIS	網目尺寸 Mesh Size		網條尺寸 Strand Size (mm)		重量 Weight kg/m ²	標準製品尺寸 LXS (mm) 參考重量(千克/片) Standard Size LXS (mm) Reference Weight (kg/sheet)		
		SWD	LWD	T	W		914X1829	1219X2438	1524X3048
XS (XF)	XS 31	12	30.5	1.2	1.5	2.36	3.95	7.01	10.96
	XS 32	12	30.5	1.6	2.0	4.19	7.01	12.50	19.46
	XS 33	12	30.5	2.3	3.0	9.03	15.10	26.80	41.94
	XS 41	22	50.8	1.6	2.0	2.28	3.81	6.78	10.59
	XS 42	22	50.8	2.3	2.5	4.10	6.86	12.20	19.04
	XS 43	22	50.8	3.2	3.5	8.00	13.40	23.80	37.16
	XS 51	25	61.0	1.6	2.5	2.15	4.20	7.46	9.99
	XS 52	25	61.0	2.3	3.0	4.33	7.24	12.90	20.11
	XS 53	25	61.0	3.2	4.0	8.05	13.50	23.90	37.39
	XS 61	34	76.2	2.3	3.0	3.19	5.33	9.48	14.82
	XS 62	34	76.2	3.2	4.0	5.91	9.88	17.60	27.45
	XS 63	34	76.2	4.5	5.0	10.40	17.43	30.90	48.31
	XS 71	50	152.4	2.3	3.5	2.53	4.23	7.52	11.75
	XS 72	50	152.4	3.2	4.0	4.02	6.72	11.92	18.67
	XS 73	50	152.4	4.5	5.0	7.06	11.80	21.00	32.79

除上述規格品外我們也製造JIS規格外的製品，歡迎洽詢。

We can also manufacture products out of JIS specification, please to contact us for details